

MERV

MERV

or



V

thetic Media

Construction

MERV 8 or MERV 11

Replacement Options for Space-Gard, Trion and Honeywell Air Cleaners

Electrostatically Charged, 100% Syn-

Carbon Media Available for Odor Control

Heavy-duty, Moisture Resistant

AUAU

Glasfloss Z-Line Series Air Cleaner Replacement Filters offer convenient alternatives when replacement of the original filter is necessary.

- The Z-Line 700 SG filter replacement option for Space-Gard[™] media #201, features a convenient cartridge design to save time and money.
- The Z-Line 500 AB and 300 AB filters are replacement options for the Trion Air Bear[™] and Air Cub[™] filters.
- The Z-Line 400 HW is a filter replacement option for the Honeywell[™] F-100 cartridge filters.

S[®]Industries

 The Z-Line 400 HWR is a filter replacement option for the Honeywell[™] FC40R cartridge filters.

Glasfloss Z-Line Series Air Cleaner Replacement Filters achieve a MERV 8 or MERV 11 per ASHRAE 52.2 Test Standard.

Glasfloss Z-Line Series Air Cleaner Replacement Filters utilize 100% synthetic media that is laminated to a galvanized steel backing that stabilizes the media during operation.

The pleats are formed in a radial configuration and controlled with separators on the air entering side to ensure proper dust loading. The pleated cartridge is encapsulated and bonded into a heavy-duty, beverage board frame to ensure filter integrity in high moisture applications. A gasket is standard on Z-Line 700 SG, 500 AB and 300 AB Series to prevent air bypass. Each filter is sealed in plastic to prevent contamination before use.

Glasfloss Z-Line Series Air Cleaner Replacement Filters are the perfect option for maintaining or upgrading specific residential or commercial systems. All Glasfloss air cleaner filters install easily without modification to the original housing.

A carbon media option is available on the Z-Line 700 SG, 500 AB and 300 AB models for odor control applications.

SPECIFICATIONS


FEATURES

CONSTRUCTION

APPLICATIONS

OPTIONS

Glasfloss Z-Line Series Air Cleaner Replacement Filters shall be of the extended surface pleated media type. The media utilized shall be electrostatically charged, 100% synthetic fibers. An expanded metal reinforcement will be laminated to the air leaving side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. Moisture resistant separators are used to insure pleat integrity during operation. The pleated cartridge will be bonded to the peripheral interior of the outer frame. A heavy-duty, moisture resistant, die cut beverage board will be utilized for an encasing frame. The frame face will be internally laminated to the pleated cartridge apexes. Gasketing on the assembled filter prevents air bypass on the Z-Line 700 SG, 500 AB and the 300 AB. Each Z-Line Series Air Cleaner Replacement Filter is individually wrapped in a plastic sleeve to protect it from contamination before installation. All filters shall be Class 2 under U.L. std. 900 and be rated up to 180 degrees Fahrenheit. The Z-Line Series Air Cleaner Replacement Filters shall be rated MERV 8 or MERV 11 when tested in accordance with the ASHRAE 52.2 Test Standard.

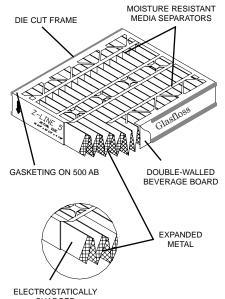

CHARGED 100% SYNTHETIC MEDIA

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

Z-LINE[®] SERIES

AIR CLEANER FILTERS

Z-Line 700 SG

MODEL NUMBER	SIZE W x H x D NOMINAL		RATED VELOCITY FPM	RES IN.	TIAL SIST. W.G. MERV 11	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H		CALS
SGP20256	20 x 25 x 6	19-3/4 x 24-1/4 x 5-7/8	300	.11	.13	42.00	508 x 635 x 152	5490	27.3	32.3
SGP20256AC	20 x 25 x 6	19-3/4 x 24-1/4 x 5-7/8	300	.21	.24	42.00	508 x 635 x 152	5490	52.24	59.7

AC = Activated Carbon

Z-Line 500 AB & 300AB 20 x 25 x 5 ABP20255 19-3/4 x 24-1/4 x 4-7/8 300 32.00 508 x 635 x 127 5490 34.8 .12 .14 29.8 ABP20255AC 20 x 25 x 5 19-3/4 x 24-1/4 x 4-7/8 300 .22 .24 32.00 508 x 635 x 127 5490 54.7 59.6 11.50 .23 ABP16253 16 x25 x 3 15-7/8 x 24-1/4 x 2-7/8 300 .21 406 x 635 x 76 5490 52.2 57.2

AC = Activated Carbon

Z-Line 400 HW HWP13204 12-1/2 x 20 x 4 12-1/2 x 20 x 4-3/8 300 12.37 318 x 508 x 102 5490 39.7 .13 .15 34.8 HWP16204 16 x 20 x 4 16 x 19-7/8 x 4-3/8 300 .13 .15 15.34 406 x 508 x102 5490 34.8 39.7 HWP16254 16 x 25 x 4 16 x 24-7/8 x 4-3/8 300 406 x 635 x 102 5490 34.8 39.7 .13 .15 19.28 HWP20204 20 x 20 x 4 20 x 19-7/8 x 4-3/8 300 .13 .15 19.44 508 x 508 x 102 5490 34.8 39.7 HWP20254 20 x 25 x 4 20 x 24-7/8 x 4-3/8 300 .13 .15 24.43 508 x 635 x 102 5490 34.8 39.7


Z-Line 400 HWR

HV	VR12124	12 x 12 x 4	11-3/4 x 11-3/4 x 3-3/4	300	.15	.17	4.45	305 x 305 x 102	5490	37.3	42.3
HV	VR12244	12 x 24 x 4	11-3/4 x 23-3/4 x 3-3/4	300	.15	.17	10.08	305 x 610 x 102	5490	37.3	42.3
HV	VR14144	14 x 14 x 4	13-3/4 x 13-3/4 x 3-3/4	300	.15	.17	6.59	356 x 356 x 102	5490	37.3	42.3
HV	VR14204	14 x 20 x 4	13-3/4 x 19-3/4 x 3-3/4	300	.15	.17	10.03	356 x 508 x 102	5490	37.3	42.3
HV	VR14254	14 x 25 x 4	13-3/4 x 24-3/4 x 3-3/4	300	.15	.17	12.89	356 x 635 x 102	5490	37.3	42.3
HV	VR16204	16 x 20 x 4	15-3/4 x 19-3/4 x 3-3/4	300	.15	.17	10.94	406 x 508 x 102	5490	37.3	42.3
HV	VR16254	16 x 25 x 4	15-3/4 x 24-3/4 x 3-3/4	300	.15	.17	14.06	406 x 635 x 102	5490	37.3	42.3
HV	VR20204	20 x 20 x 4	19-3/4 x 19-3/4 x 3-3/4	300	.15	.17	14.58	508 x 508 x 102	5490	37.3	42.3
HV	VR20254	20 x 25 x 4	19-3/4 x 24-3/4 x 3-3/4	300	.15	.17	18.75	508 x 635 x 102	5490	37.3	42.3

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" depth. Recommended final resistance is .50" in. w. g.


MERV 8 MINIMUM PARTICLE SIZE EFFICIENCY


MERV 8 STANDARD PRESSURE DROP

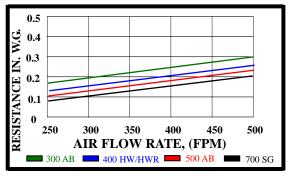

BU 100 80 60 40 20 0 .1 1 1 10 PARTICLE SIZE, MICRONS



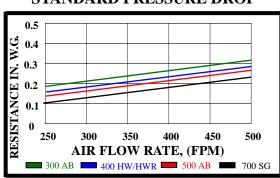


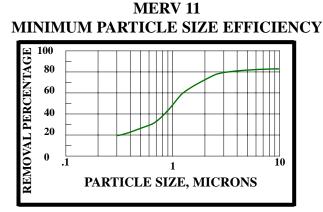



> 700 SG -	 Z-Line 700 SG (Space-Gard[™]): A replacement option for the Space-Gard media #201. The Z-Line 700 SG comes factory assembled to assure quality and easy installation. The Z-Line 700 SG incorporates 100% synthetic fibers that are electrostatically charged, thermally bonded and manufactured in an engineered gradient structure. The Z-Line 700 SG achieves a MERV 8 or MERV 11 when tested in accordance with the ASHRAE 52.2 Test Standard. Pre-applied gasketing on the assembled filters helps prevent air bypass. Installation is quick: a) Simply remove the internal plastic frame from the external metal housing and remove the dirty filter and its components. b) Install the new Z-Line 700 SG filter with the metal grid (air leaving side) facing up and close the plastic frame and slide it back into the metal housing. The Glasfloss Z-Line 700 SG is also available in the 700 SGX, an activated carbon media. Refer to Z-Line SGX when ordering. Each filter is sealed in plastic to avoid contamination before use.
> 500 AB & 300 AB -	Z-Line 500 AB (Air Bear [™]) & 300 AB (Air Cub [™]) : These pleated filters are an ideal replacement option for the Trion Air Bear and Air Cub filters. The Z-Line 500 AB & 300 AB incorporate 100% synthetic fibers that are electrostatically charged, thermally bonded and manufactured in an engineered gradient structure. The Z-Line 500 AB & 300 AB achieves a MERV 8 or MERV 11 when tested in accordance with the ASHRAE 52.2 Test Standard. Pre-applied gasketing on the top and bottom of the filters help prevent air bypass. No modification to the filter frame is necessary. The Glasfloss 500 AB & 300 AB filters are available with activated carbon to absorb unpleasant household odors. Refer to Z-Line 500 ABX & 300 ABX when ordering. Each filter is sealed in plastic to avoid contamination before use.
400 HW & HWR	Z-Line 400 HW & HWR (Honeywell [™]): Replacement options for the Honeywell F-100 and FC40R air cleaner filters. The Z-Line 400 HW and 400 HWR incorporate 100% synthetic fibers that are electrostatically charged, thermally bonded and manufactured in an engineered gradient structure. The Z-Line 400 HW and 400 HWR achieve a MERV 8 or MERV 11 when tested in accordance with the ASHRAE 52.2 Test Standard. Each filter is sealed in plastic to avoid contamination before use. Honeywell is a registered trademark of Honeywell Products, Inc.

Glasfloss HWR Filter (Wall or Ceiling Mounted) Requires a Minimum 3 7/8" Duct Depth Opening to Accept This Filter.

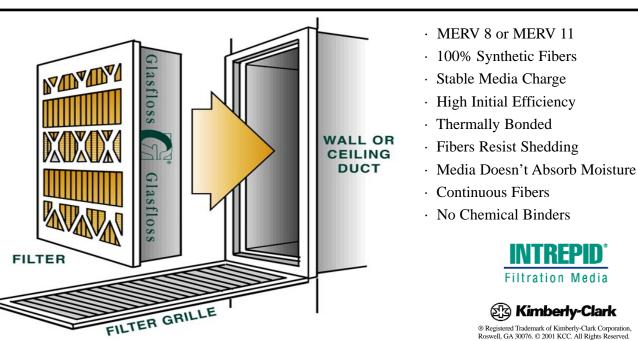

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.



Air Cleaner Cross Reference Guide

Air Cleaner	Glasfloss		
Products	Model and Part Number		
Research Products Space-Gard [™]	Z-Line 700 SG MERV 8		
<u>Model 2200, 2250</u>			
Replacement Filter Type 201	SGP20256		
<u>Trion</u> [™]	Z-Line 500 AB & 300 AB MERV 8		
Air Bear - 229990-102	ABP20255		
Air Cub - 229990-101	ABP16253		
Honeywell [™]	Z-Line 400 HW MERV 8		
Model F-100			
FC100A1052	HWP13204		
FC100A1003	HWP16204		
FC100A1029	HWP16254		
FC100A1011	HWP20204		
FC100A1037	HWP20254		
<u>Honeywell</u> [™]	Z-Line 400 HWR MERV 8		
Model FC40R			
FC40R1011	HWR20204		
N/A	HWR20254		
FC40R1052	HWR16204		
FC40R1060	HWR16254		
FC40R1102	HWR14144		
FC40R1110	HWR14204		
FC40R1045	HWR14254		
FC40R1037	HWR12244		
FC40R1094	HWR12124		

Distributed by:	National Air Filtration Association
	(U OL

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com